



CHL-750XL Under Sink Water Chiller
(Learn More About Our Superior Design Approach)

[See the brief slide show presentation of Features and Benefits](#)




More convenient than swapping out bottles on the cooler. Works great with a drinking water system such as a reverse osmosis RO or filtration system. The purity of Reverse Osmosis calls for manufacturers to make stainless steel chillers to preserve the purity of the cold drinking water. Buy with confidence with 100% stainless steel contact surfaces on every Chiller Daddy®. Simple to install below the sink, beneath a cabinet countertop or in a basement.

Hooks up to your current dispenser water faucet. Whisper quiet operation. Direct temperature reading design extends compressor life by preventing the "short-cycling" that is a common cause of refrigeration units failure. Designed to deliver refreshing and thirst quenching refreshment for many years. Premium design & quality in every detail. Buy with confidence.

Drinking cold water is a refreshing way to satisfy even the biggest thirsts. Order Yours Today.


Here is a typical installation under the sink.

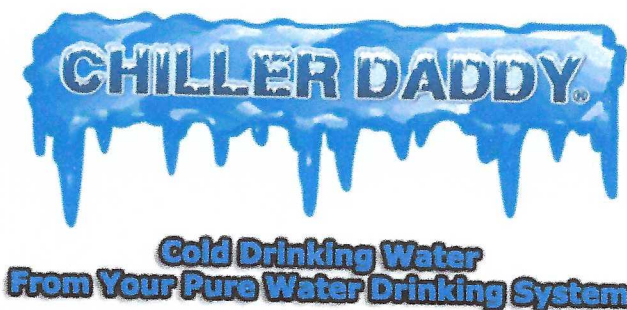

Designer Food Grade SUS304 Stainless Steel Inside & Out !

[Home](#) [Features](#) [Specifications](#) [Where to Buy](#) [FAQ](#) [Contact](#)
SUS304 Food Grade Stainless Steel inside and out. Premium Quality In Every Detail !

Chiller Daddy ® CHL-750XL Undersink Water Chiller Specifications

Model #:	CHL-750XL
Product Type:	Undersink Water Chiller for Residential and Office Use
Product Dimensions:	L: 16" x W: 8" x H: 13.38" (406x203x340)
Product Weight:	23.75 lbs (10.8 KG)
Shipping Dimensions:	L: 20.87" x W: 13" x H: 16.93" (530x330x430)
Shipping Weight:	27.25lbs (12.5 KG)
Product Color:	Appliance Grade Designer Brushed 304 Stainless Steel Cabinet
Application:	Chills Drinking Water for Residential and Office Use. Connects to RO Reverse Osmosis and Filtered Drinking Water Systems.
Warranty:	1-Year Non-Transferable Limited Manufacturer's Warranty *
Power:	110 Volts 60Hz 3 Prong 72" Grounded Cord Attached 1.8A 140W - Motor-Compressor Thermally Protected
Certifications:	 <p>Conforms to UL Standard 399. Certified to CSA Standard C22.2 #s 60335-2-24 & 60335-1</p>
Refrigerant Type:	R-134a 54g (1.9oz) Environmentally Friendly
Inlet Pressure:	15~100psi (0.10~0.69MPa) Optional Pressure Limiter Available For Use If Installation is Not On a Reverse Osmosis RO System or Over 100 PSI. 30-50 psi (factory preset to 40 PSI) Pressure Limiter Allows Adjustable Flow Rate to the Faucet.
Cold Water Output:	1.75 Gallons Per Hour (6.6 Liters 6.6L/H (<10C))
Tank:	SUS304 Stainless Steel 0.8 Gallon (3L)
Connections:	1/4" O.D. Stainless Steel Tubes In & Out Drain Cap is G 1/4" BSPP Thread Stainless Steel
Cold Water Thermostat Temperature Range:	42 - 54°F Adjustable Thermostat - Factory Preset for Normal

Chiller Daddy CHL-750XL Water Undersink Chiller Specifications

	Use **
Shipping:	924 Per 40'HQ Container Non-Palletized 340 Per 20' Container Non Palletized 28 Per Pallet 7 per row (44"x48"x74") 880 lbs. Individually Prepackaged for Home Delivery Shipping.
UPC#:	850003338149

[*Chiller Daddy@ warranty contact](#)

[CHL-501 spec sheet](#)

** Temperature range may be affected by proper ventilation to allow heat to vent away from the chiller.

{***} Chiller Daddy@ reserves the right to change specifications and design without notice.

[Chiller Daddy](#) © is the Registered Trademark of Chiller Daddy LLC - All Content Copyright 2017-2023

